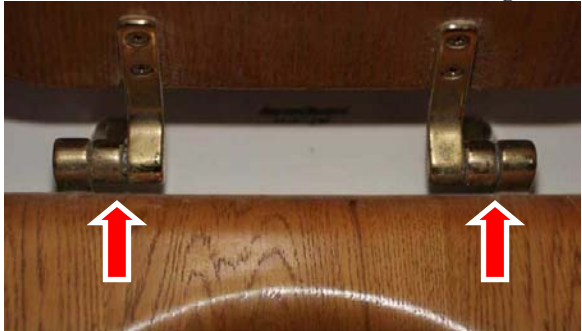


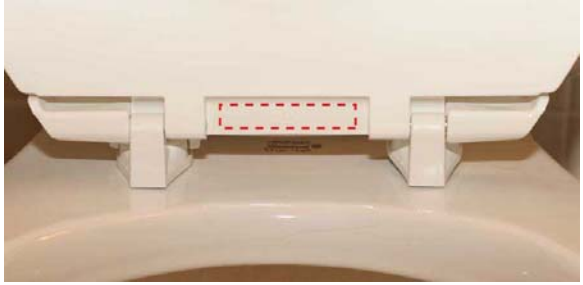


The Johnny Light fits most, but not all standard toilet seats.

1. Remove the battery cap and install the batteries. Note the polarity marked on the battery cap.
2. Lift the toilet lid and determine what type of seat you have, external or integrated hinges.

External Hinges	Integrated Hinges
<p>3. The external hinge seat type comes in wood and plastic. It is the most common type of seat and the simplest installation. Place the bracket and Johnny Light into the gaps between the back of the seat and the hinge.</p>  <p>4. That's it, you're done. This is how it should look.</p> 	<p>3. The integrated hinge requires mounting on the bottom of the seat using the extra Velcro supplied. Remove the Johnny Light from the bracket.</p>  <p>4. Lift the seat and verify the area between the hinges (marked with the red dotted line below) is clean and dry.</p> <p>5. Apply the extra Velcro strip here.</p> <p>6. Holding the Johnny Light with the battery cap toward the left, press it firmly onto the Velcro. Don't drop the light in the bowl or it's sunk.</p> 
<h3>Incompatibility</h3>	
<p>Some wooden seats have a rod between the hinges where the Johnny Light normally installs. Installation is not recommended.</p>	<p>Some integrated hinge seats have no space between the hinges where the Johnny Light normally installs. Installation is not recommended.</p>